

Introduction of Deep Generative Models

Hao Dong

Peking University



<https://deep-generative-models.github.io>



<https://zsdonghao.github.io>

Introduction



- What and Why
- Generative Models vs. Computer Graphics
- Discriminative vs. Generative
- Selected Generative Applications
- Selected Advanced Topics
- Challenges
- Syllabus
- Prerequisites
- Logistics
- Grading Policies

- **What and Why**
- Generative Models vs. Computer Graphics
- Discriminative vs. Generative
- Selected Generative Applications
- Selected Advanced Topics
- Challenges
- Syllabus
- Prerequisites
- Logistics
- Grading Policies

What and Why



Speech



What and Why




“What I cannot create, I do not understand”

--- Richard Feynman

Understand the complex and unstructured data

(image, text, speech, video ...)

Artificial Intelligence, Machine Learning, Deep Learning ...

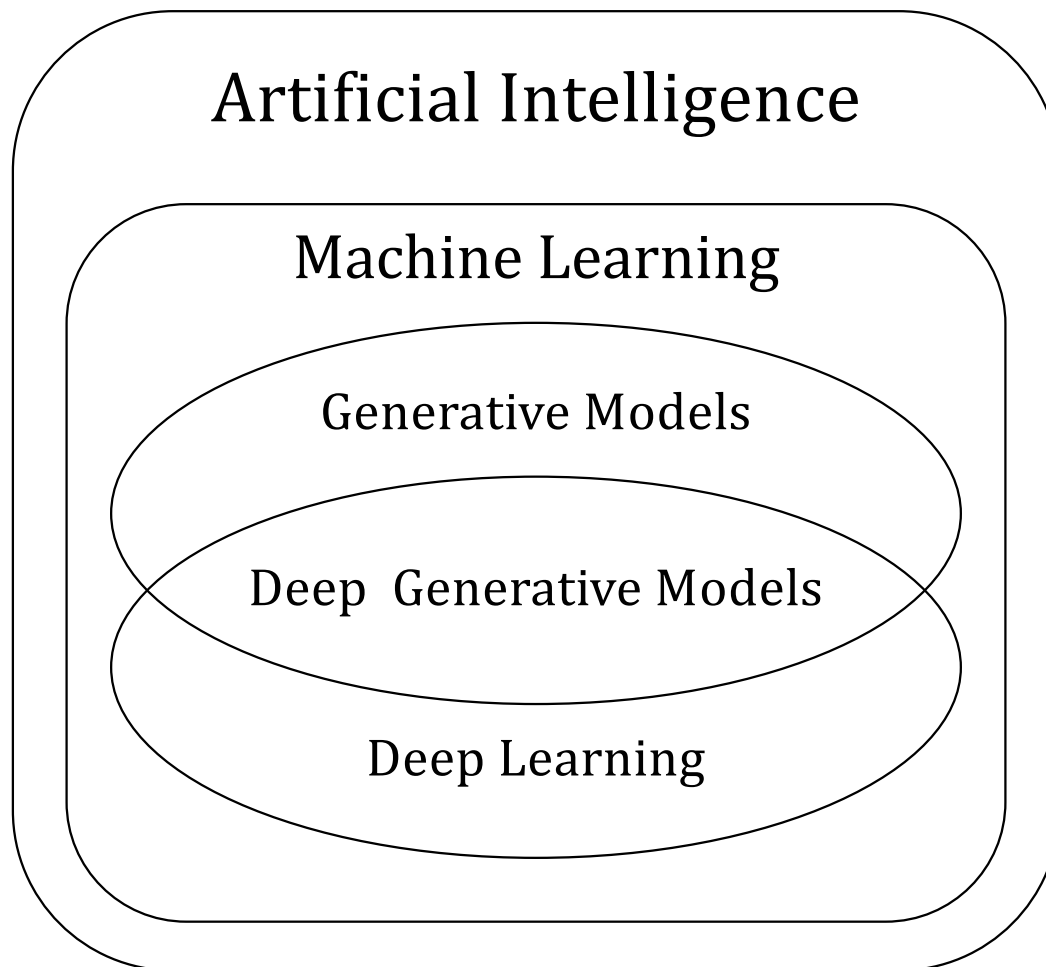

- What and Why
- **Generative Models vs. Computer Graphics**
- Discriminative vs. Generative
- Selected Generative Applications
- Selected Advanced Topics
- Challenges
- Syllabus
- Prerequisites
- Logistics
- Grading Policies


Computer Vision vs. Computer Graphics

- Generate data (e.g., image) in computer

Ball(color=yellow, position=(50, 100),...)
Ball(color=red, position=(30, 75),...)
Ball(color=blue, position=(30, 125),...)
...
...

“description”

Computer Graphics



Computer Vision




“observation”

Generative Models vs. Computer Graphics


- **Statistical Generative Models** are **data-driven** methods

Computer Graphics

Statistical Generative Models

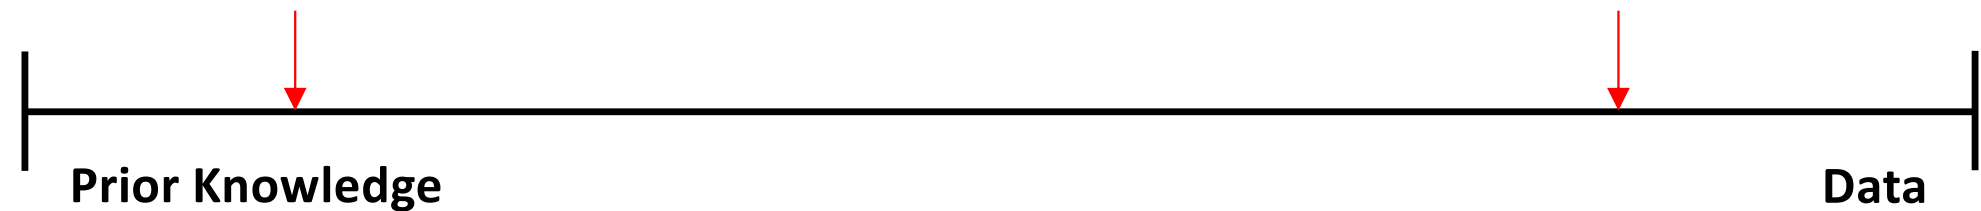

Material, Physical Modeling, Lighting

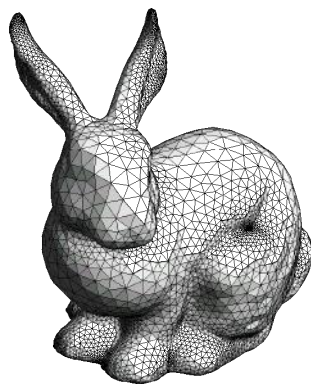


Generative Models vs. Computer Graphics

- **Computer Graphics**
 - Purely based on prior knowledge
 - Difficult to scale and generalise
 - Development is time-consuming
- **Machine Learning/Deep Learning**
 - Reduce the need of prior knowledge
 - Learn from data
- **Statistical/Deep Generative Models** still need some prior knowledge ...
 - loss function, learning method, architecture, prior distribution (e.g., Gaussian)

Generative Models vs. Computer Graphics

- **Statistical/Deep Generative Models**

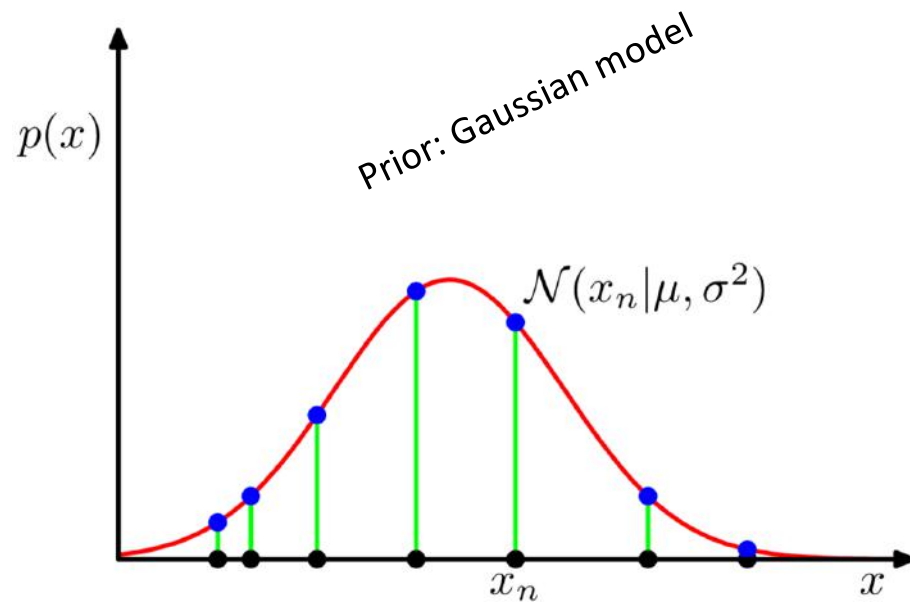

- Given data samples
- Learn the probability distribution $p(x)$

So that

- It is generative because new data samples can be sampled from $p(x)$

$$x_{new} \sim p_x$$

Generative Models vs. Computer Graphics

- **Statistical/Deep Generative Models**

The data distribution can be high-dimensional, like images



- Given data samples
- Learn the probability distribution $p(x)$

So that

- It is generative because new data samples can be sampled from $p(x)$


$$x_{new} \sim p_x$$

- What and Why
- Generative Models vs. Computer Graphics
- **Discriminative vs. Generative**
- Selected Generative Applications
- Selected Advanced Topics
- Challenges
- Syllabus
- Prerequisites
- Logistics
- Grading Policies

Discriminative vs. Generative


Discriminative models: classify data

finding the **decision boundary** $P(Y|X)$

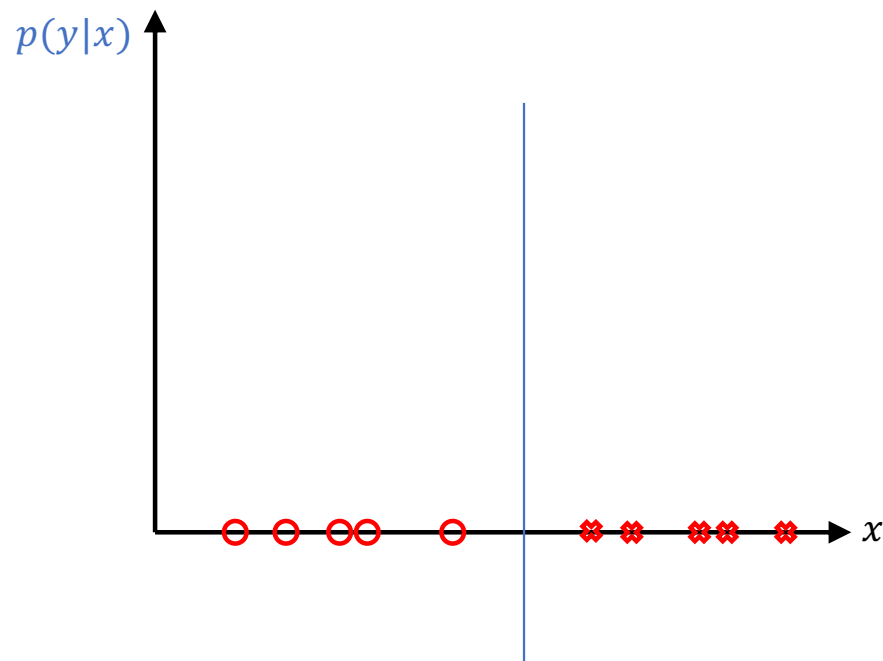

Generative models: generate data

finding **joint distribution** $P(Y, X)$

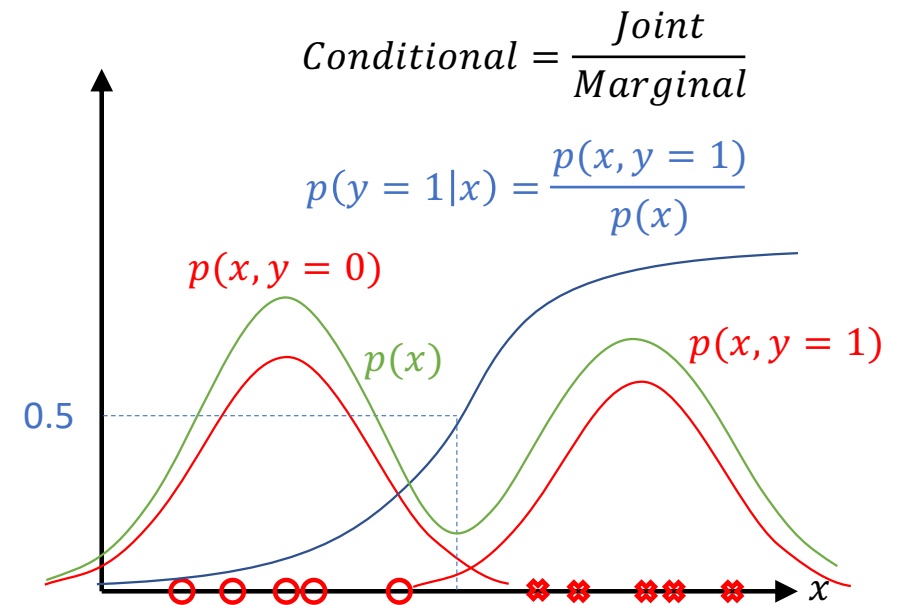


Note: Generative models can perform both generative and discriminative tasks

Discriminative vs. Generative

Discriminative models: classify data

finding **conditional distribution** $P(Y|X)$

$$P(Y = \text{Cat} | X = \text{img}) = 0.99$$




Decision boundary

Generative models: generate data

finding **joint distribution** $P(Y, X)$

$$Y = \text{Cat}, X = \text{img}$$



$$Y = \text{Dog}, X = \text{img}$$



The data distribution can be high-dimensional, like images

Discriminative vs. Generative

- Discriminative models do not model/learn the probability distribution of data $p(x)$ and find the decision boundary directly to form $p(y|x)$
- Generative models need to first model/learn the probability distribution of data $p(x)$ and the joint probability distribution $p(x, y)$ and then estimate the conditional probability $p(y|x) = \frac{p(x,y)}{p(x)}$

- What and Why
- Generative Models vs. Computer Graphics
- Discriminative vs. Generative
- **Selected Generative Applications**
- Selected Advanced Topics
- Challenges
- Syllabus
- Prerequisites
- Logistics
- Grading Policies

Selected Generative Applications



We usually study generative models with:

image

text

speech

...

or their combinations

Selected Generative Applications

Discriminative models

$$P(Y = \text{Cat} | X = \text{img})$$



“Unconditional” generative models: generate data from a prior distribution

$$P(X, Z) = P(X|Z)P(Z)$$

$$P(X =$$




$$| Z = N(0,1))$$

Selected Generative Applications



“Class” conditional generative models

$$P(X =  | Y = \textit{Cat})$$

“Text” conditional generative models

$$P(X =  | Y = \textit{“a flower with white petals and yellow stamen”})$$

“Text-image” conditional generative models

$$P(X =  | Y_1 = , Y_2 = \textit{“a yellow bird with grey wings”})$$

Joint distribution



Generative Adversarial Text to Image Synthesis. *S. Reed, Z. Akata et al. ICML. 2016.*

Semantic Image Synthesis via Adversarial Learning. *H. Dong, S. Yu et al. ICCV 2017.*

Selected Generative Applications

Wavenet: Text to Speech

$$P(X = \textit{speech} | Y = \textit{sentence})$$

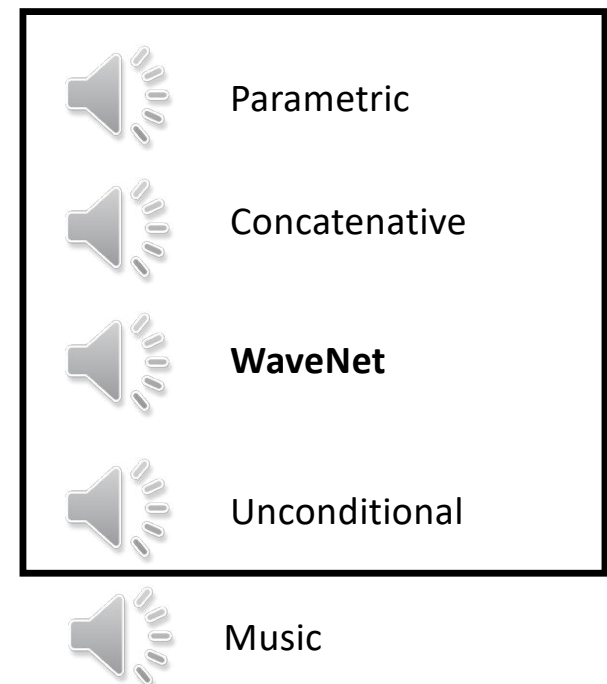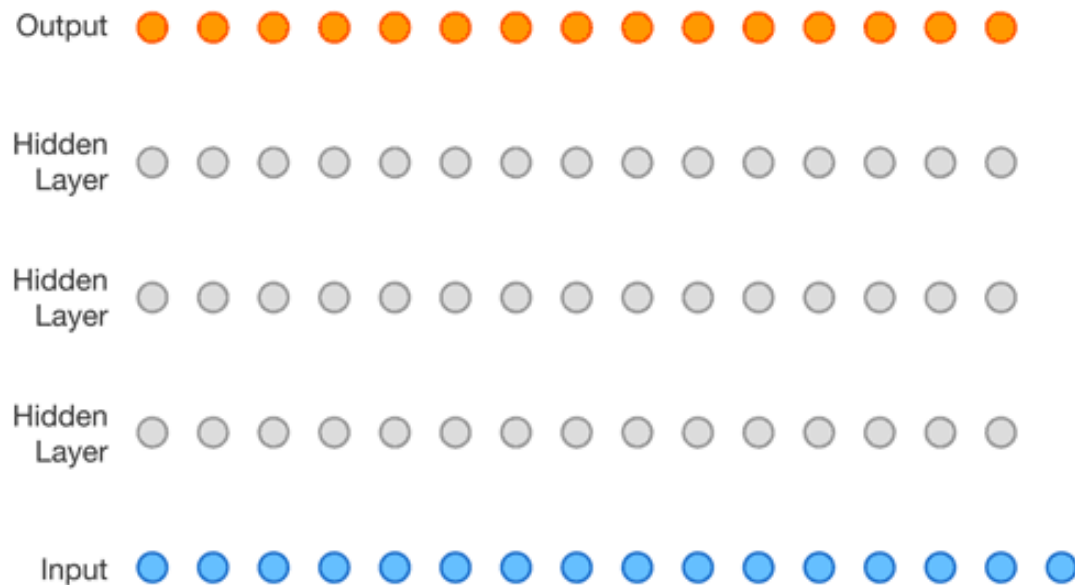

Selected Generative Applications

Image Super Resolution

$P(\text{High resolution image} \mid \text{Low resolution image})$

bicubic
(21.59dB/0.6423)



SRGAN
(21.15dB/0.6868)



original



Selected Generative Applications

Image Super Resolution


$P(\text{High quality image} \mid \text{Low quality image})$



Photo-Realistic Single Image Super-Resolution Using a Generative Adversarial Network. C. Ledig, L. Theis et al. CVPR 2017.

Selected Generative Applications


- Image inpainting

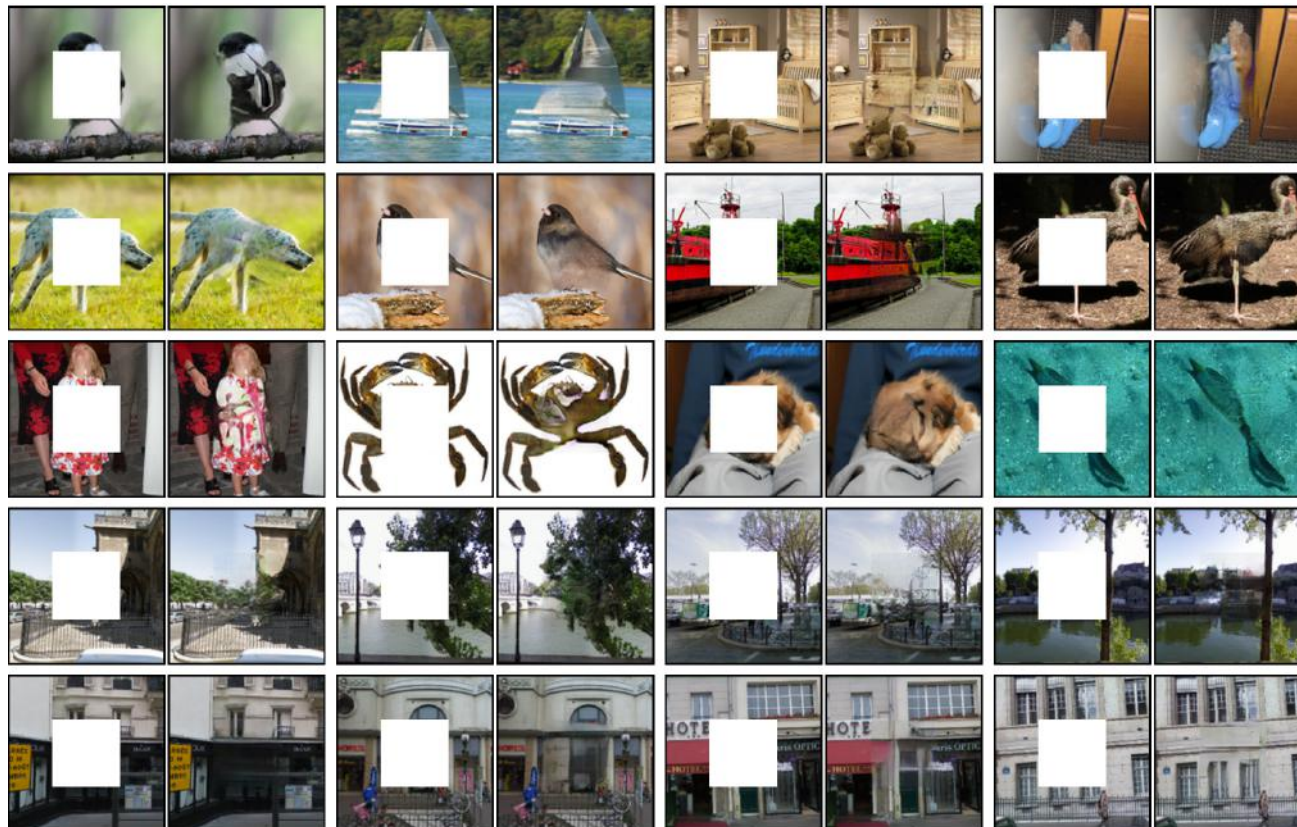

Context Encoders: Feature Learning by Inpainting. *D. Pathak, J. Donahue. CVPR. 2017*

Selected Generative Applications

- **2D→3D via Image Inpainting**

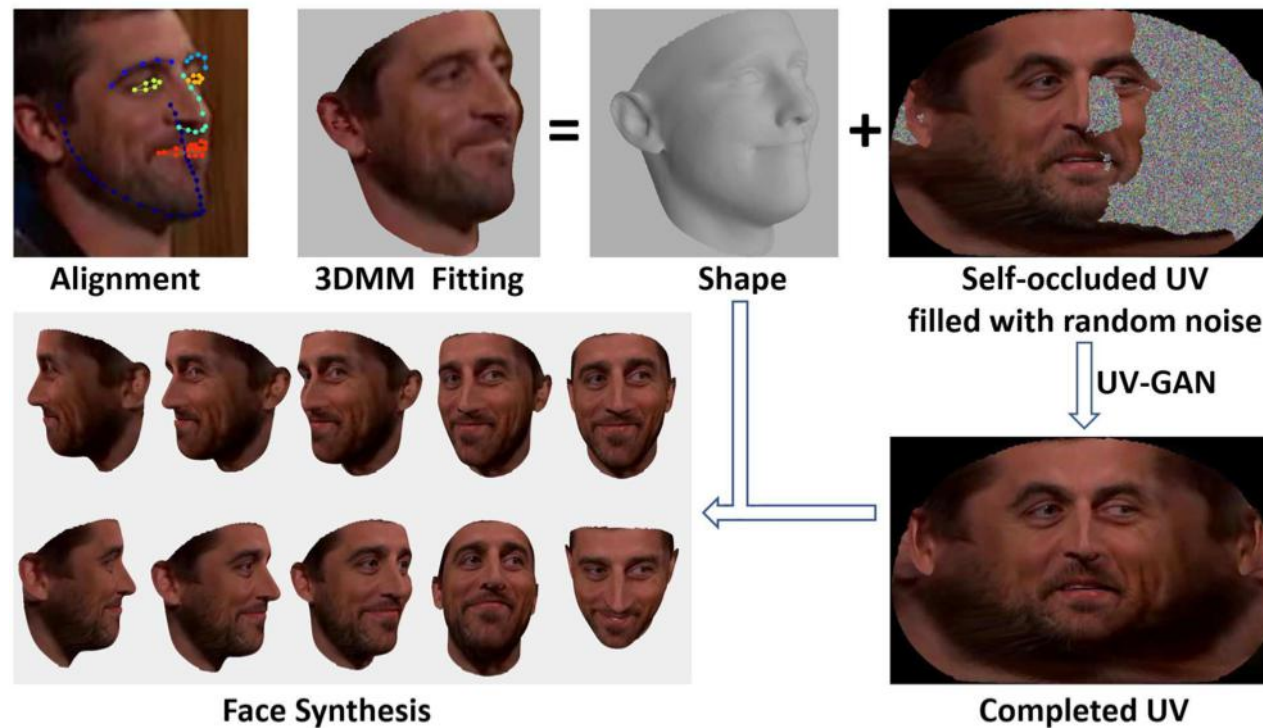

UV-GAN: Adversarial Facial UV Map Completion for Pose-invariant Face Recognition.

J. Deng, S. Cheng et al. CVPR. 2018.

Selected Generative Applications

Image-to-Image Translation

$$P(\text{image from domain } B \mid \text{image from domain } A)$$





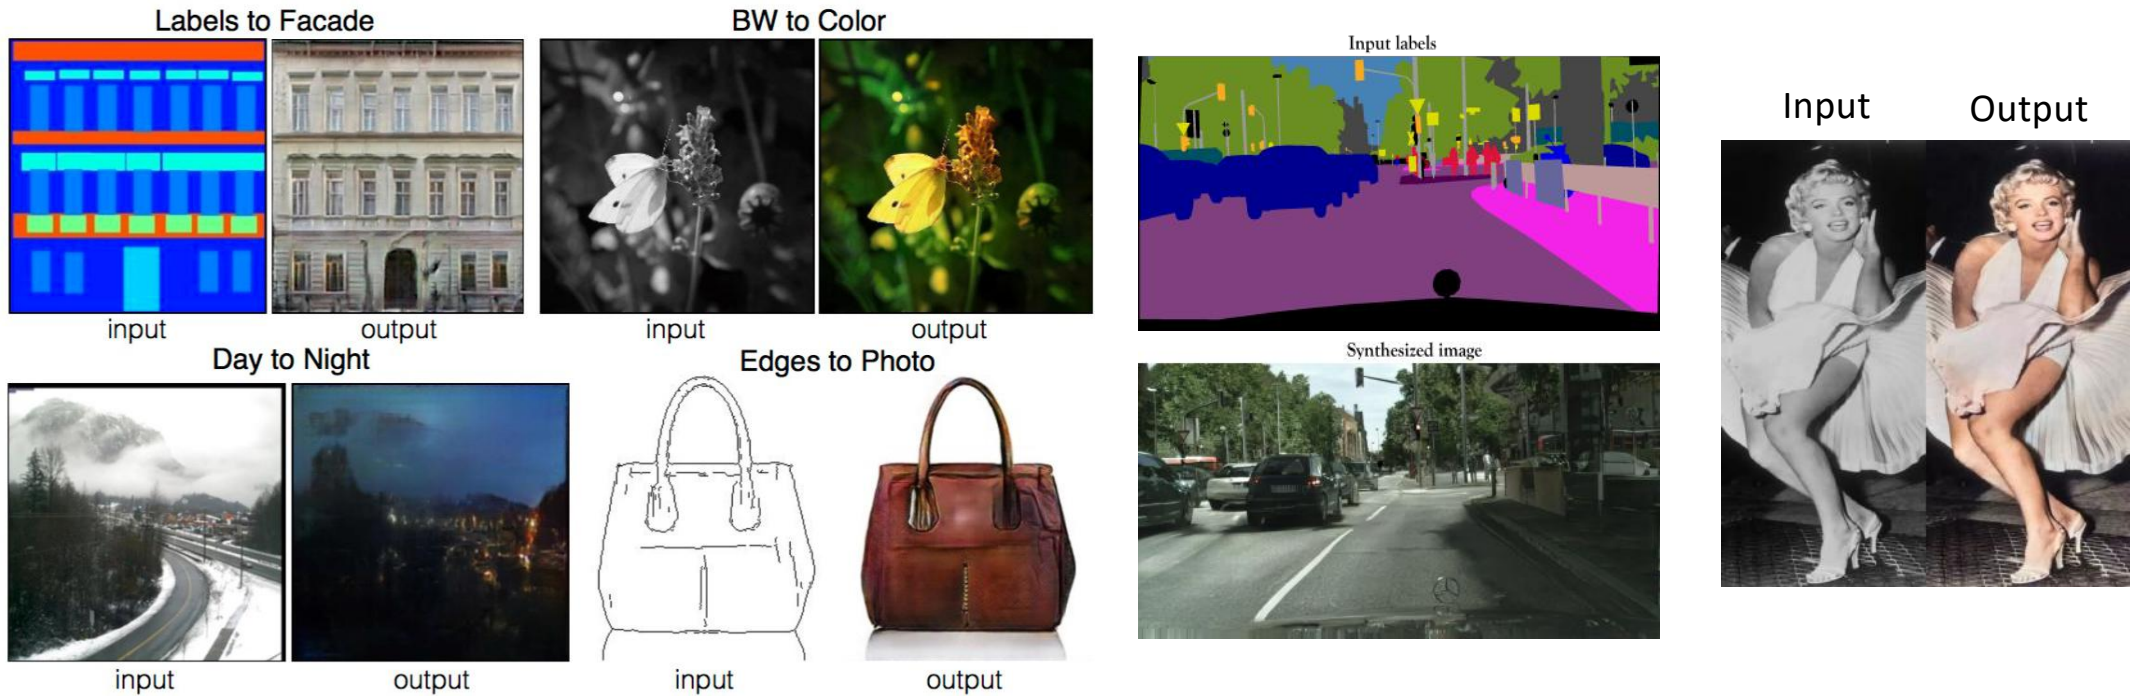


Photo-Realistic Single Image Super-Resolution Using a Generative Adversarial Network. *C. Ledig, L. Theis et al. CVPR 2017.*

Selected Generative Applications

Audio Super Resolution

$P(\text{High resolution signal} \mid \text{Low resolution signal})$

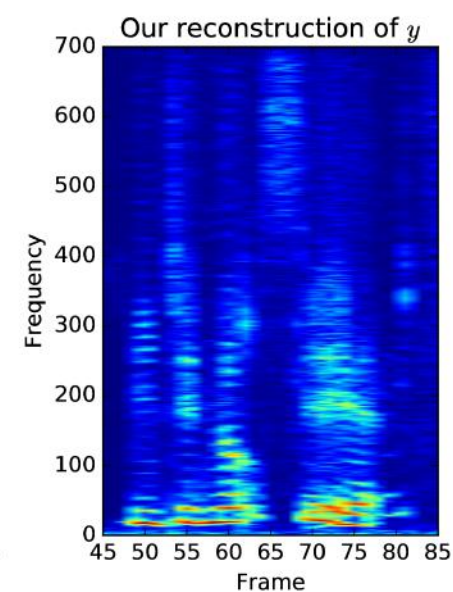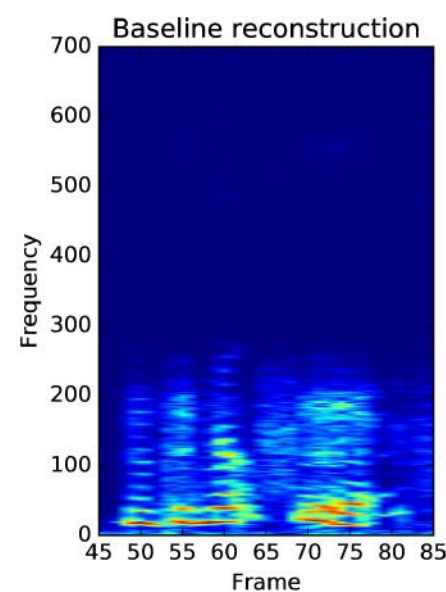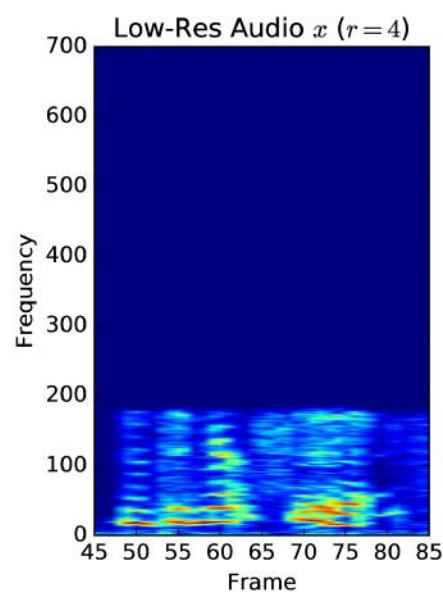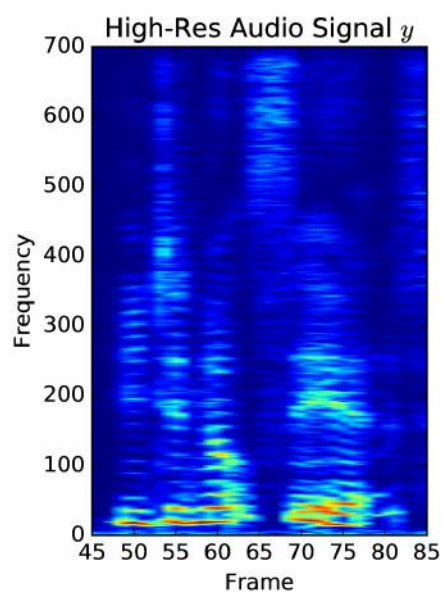

Selected Generative Applications


DeepFake

$P(me | you)$



Selected Generative Applications

- **Face Rotation**

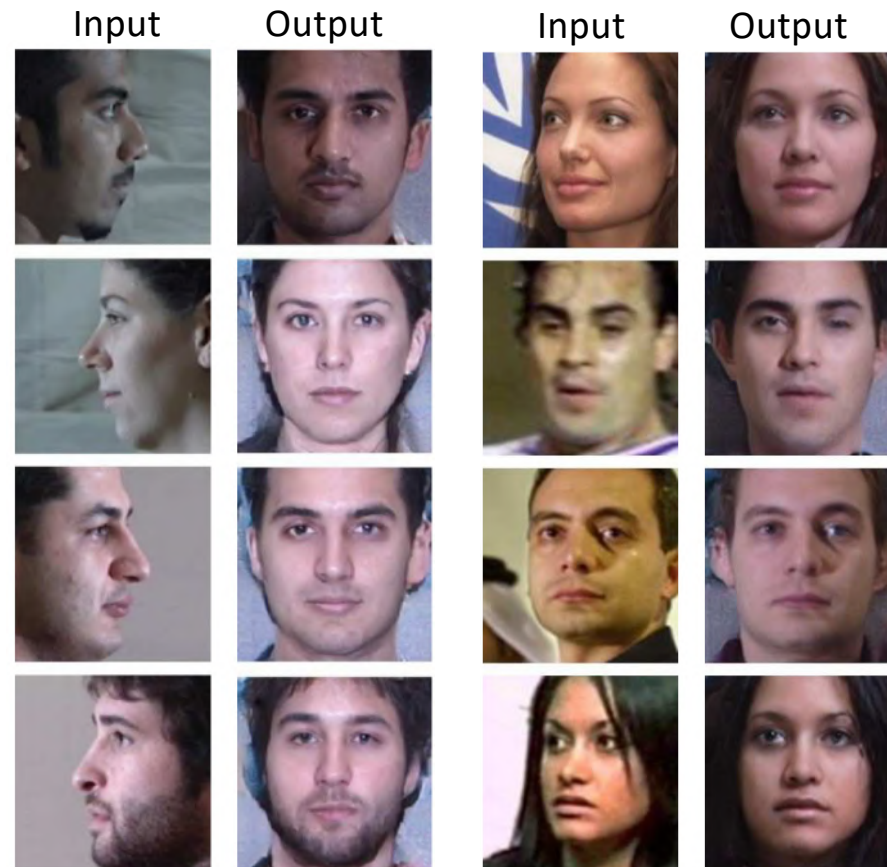

Pose-Guided Photorealistic Face Rotation. *Y. Hu, X. Wu et al. CVPR. 2018*

Selected Generative Applications


Everybody Dance Now

$$P(\text{my dance} \mid \text{your dance})$$



Selected Generative Applications

Combine Image and Sentence: Two Conditions

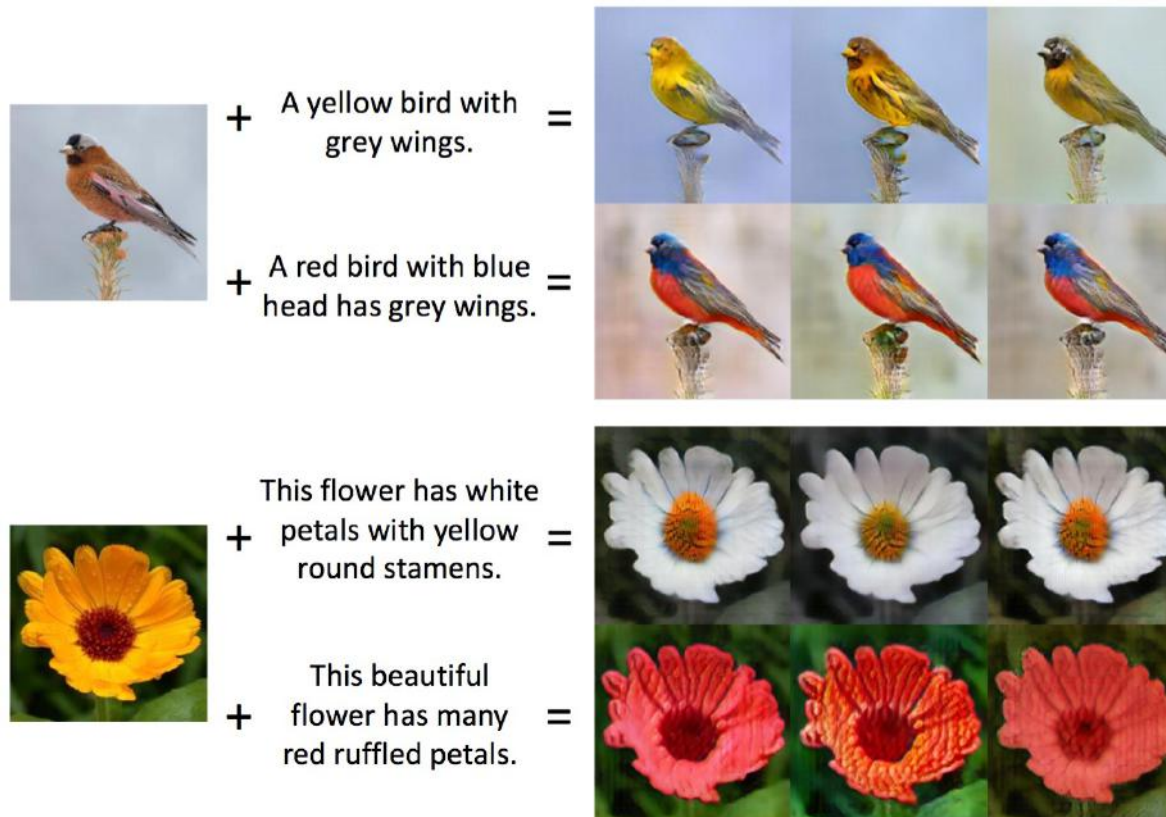

Selected Generative Applications

- 2D Video to 3D shape



- What and Why
- Generative Models vs. Computer Graphics
- Discriminative vs. Generative
- Selected Generative Applications
- **Selected Advanced Topics**
- Challenges
- Syllabus
- Prerequisites
- Logistics
- Grading Policies

Selected Advanced Topics


Domain Adaptation: Model the distribution



Source: Labelled



Target: Unlabelled



$$S(\mathbf{f}) = \{G_f(\mathbf{x}; \theta_f) \mid \mathbf{x} \sim S(\mathbf{x})\}$$

$$T(\mathbf{f}) = \{G_f(\mathbf{x}; \theta_f) \mid \mathbf{x} \sim T(\mathbf{x})\}$$

Domain shift among sources and target



Domain adaptation needed!

Selected Advanced Topics

Adversarial Attack



Fig. 4: An example of digital dodging. Left: An image of actor Owen Wilson, correctly classified by VGG143 with probability 1.00. Right: Dodging against VGG143 using AGN's output (probability assigned to the correct class: < 0.01).



Fig. 9: An illustrations of attacks generated via AGNs. Left: A random sample of digits from MNIST. Middle: Digits generated by the pretrained generator. Right: Digits generated via AGNs that are misclassified by the digit-recognition DNN.

Sharif M, Bhagavatula S, Bauer L, et al. Adversarial generative nets: Neural network attacks on state-of-the-art face recognition[J]


Selected Advanced Topics

Meta Learning

face landmark tracks


source frame

target frame

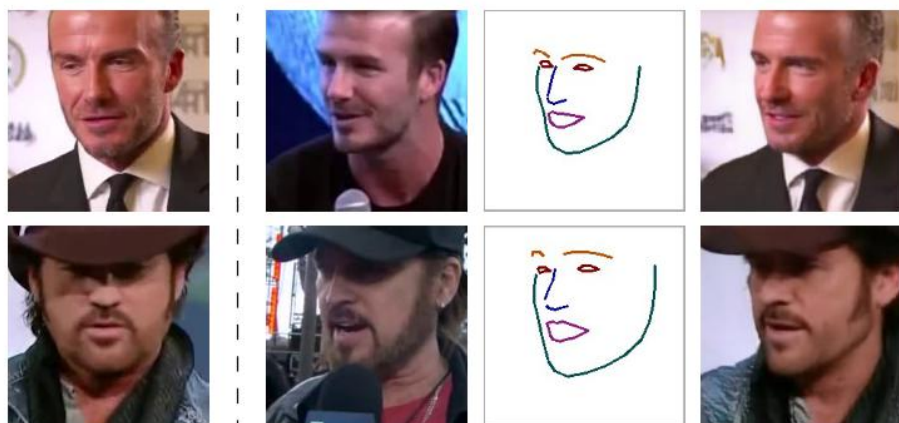

Source

Target → Landmarks → Result

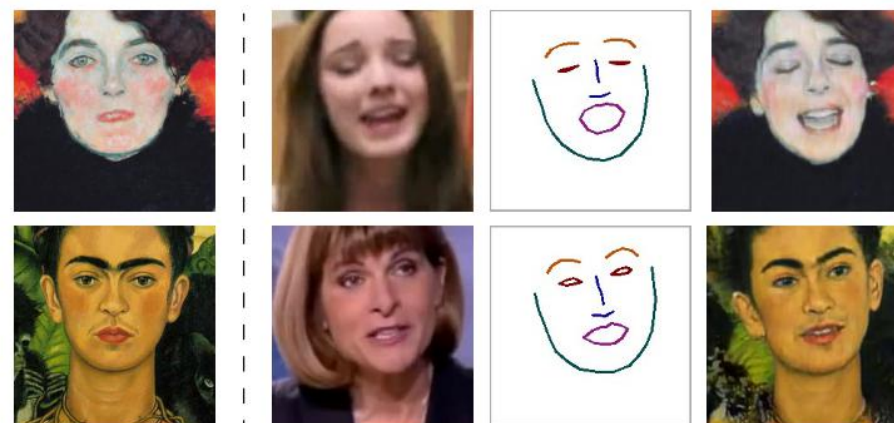

Source

Target → Landmarks → Result

extracted face landmark tracks from a different video sequence of the same person

The results are conditioned on the landmarks taken from the target frame, while the source frame is an example from the training set.

Selected Advanced Topics

Imitation Learning




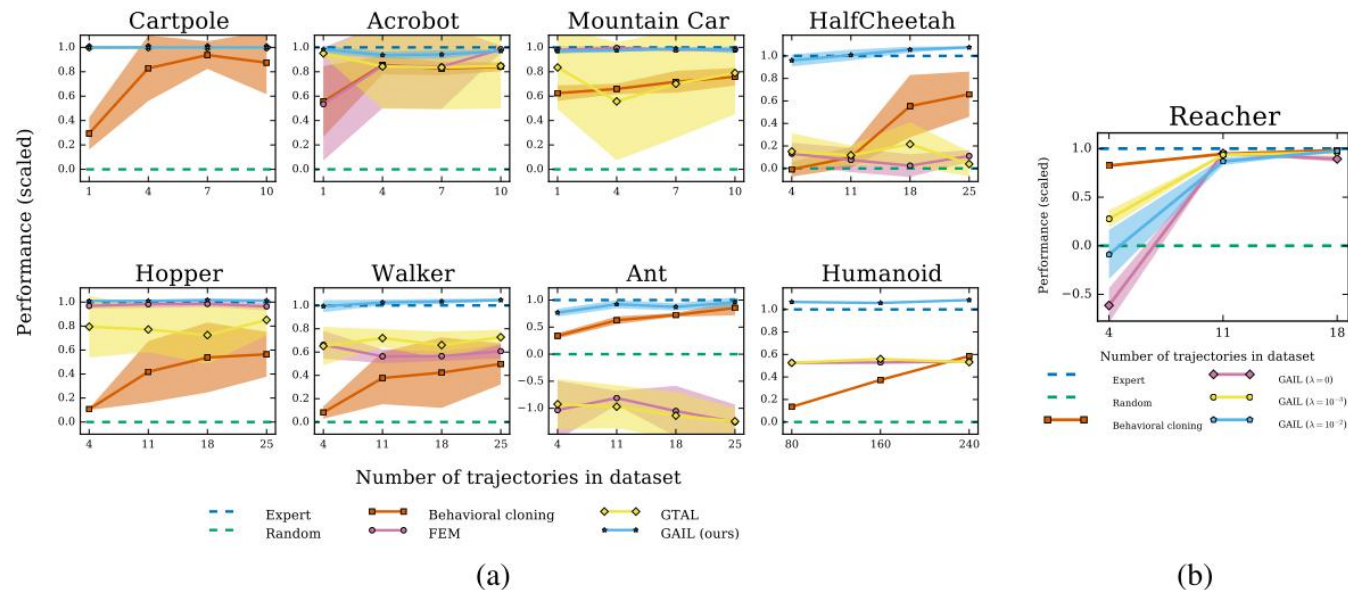


Figure 1: (a) Performance of learned policies. The y -axis is negative cost, scaled so that the expert achieves 1 and a random policy achieves 0. (b) Causal entropy regularization λ on Reacher. Except for Humanoid, shading indicates standard deviation over 5-7 reruns.

Ho J, Ermon S. Generative adversarial imitation learning[C]
 Advances in neural information processing systems.

Selected Advanced Topics

Reinforcement Learning: World Model

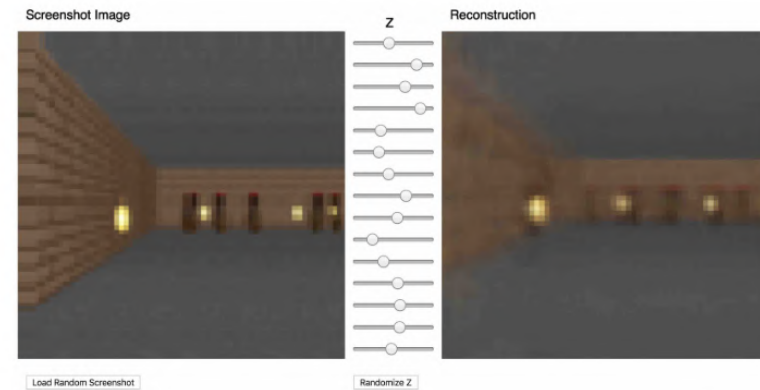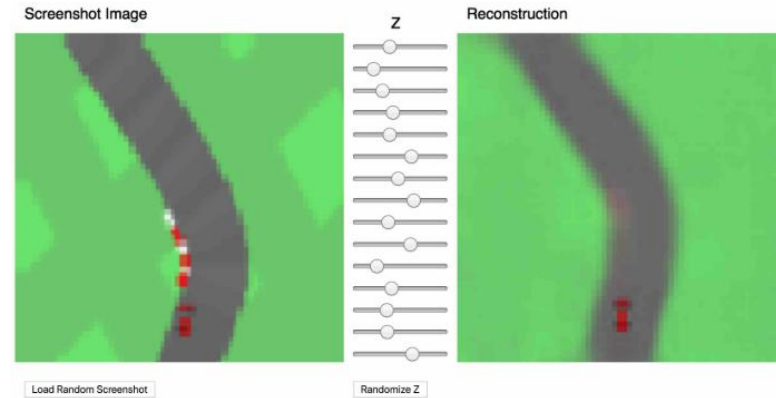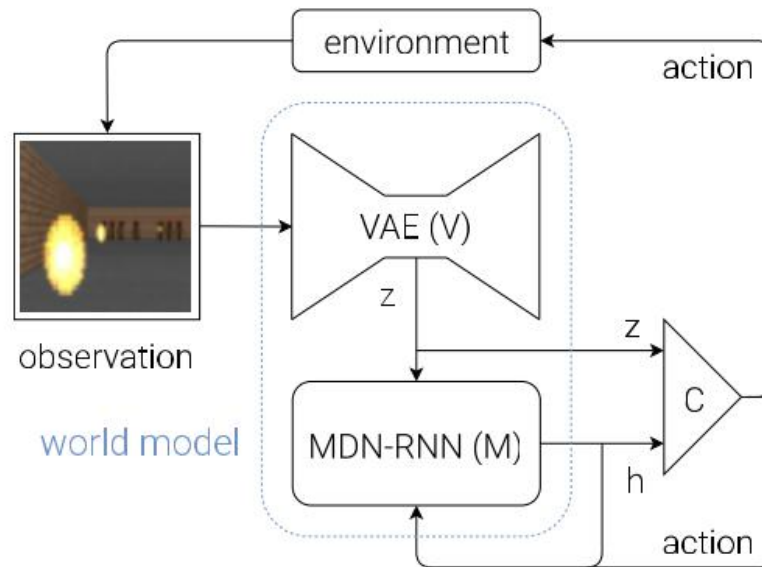

Ha D, Schmidhuber J. World models[J]. arXiv preprint arXiv:1803.10122, 2018.

Selected Advanced Topics

Deep Generative Models relate to all of the following topics:

- Unsupervised Learning
- Semi-supervised Learning
- Weakly-supervised Learning
- Dual Learning
- Self-supervised Learning
- Self-augmented Learning
- ...
- ...
- ...

- What and Why
- Generative Models vs. Computer Graphics
- Discriminative vs. Generative
- Selected Generative Applications
- Selected Advanced Topics
- **Challenges**
- Syllabus
- Prerequisites
- Logistics
- Grading Policies



Challenges

- **Representation ability**

For 1-D data x , the probability distribution $p(x)$ is simple, e.g., Gaussian?

For high-dimensional data $\mathbf{x} = (x_1, x_2, \dots, x_n)$, e.g., n pixels

how do we learn the joint distribution $p(x_1, x_2, \dots, x_n)$?

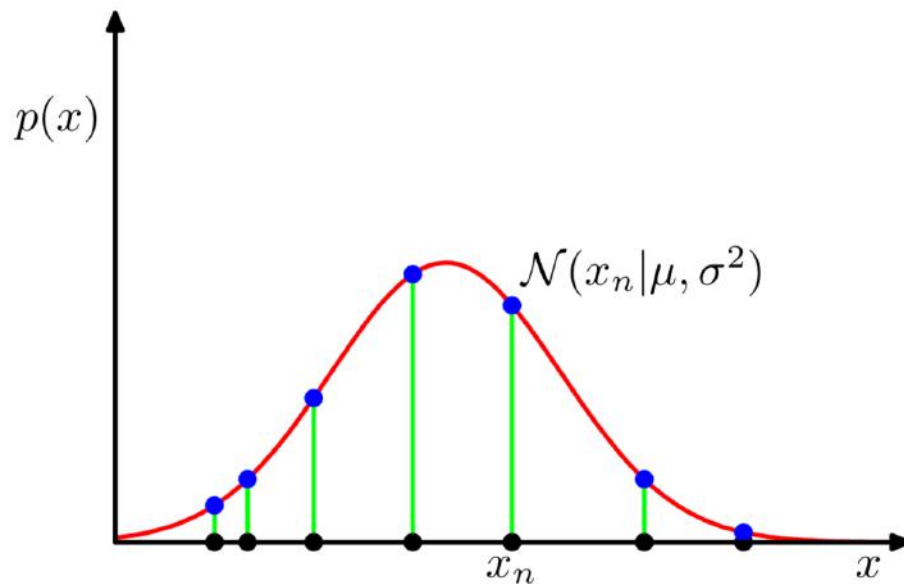

Challenges

- **Learning method**

If we can **represent** the $p(x)$, the next question:

how do we **measure** and **minimise** the distance

between the estimated distribution $p(x)$ and the real distribution p_{data} ?

If we use a parametric model (e.g., Gaussian) to represent $p(x)$,
it can be an optimisation problem:

$$\min_{\theta \in \mathcal{M}} \mathcal{L}(p_{data}, p_{\theta}(x))$$

where the parameter θ is from the model \mathcal{M}

Challenges



- Inference**

If we can represent the $p(x)$ and successfully learn it, we now can:

1. Generative task (sampling): $\mathbf{x}_{new} \sim p(\mathbf{x})$
2. Density estimation: $p(x)$ high if \mathbf{x} looks like a real data sample

the final question: how do we perform discriminative task?

i.e., invert the generative process

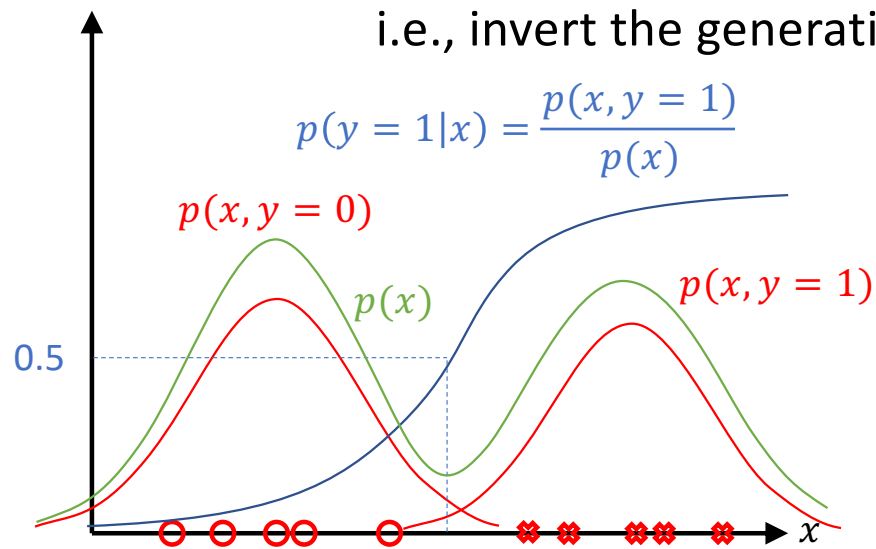

- What and Why
- Generative Models vs. Computer Graphics
- Discriminative vs. Generative
- Selected Generative Applications
- Selected Advanced Topics
- Challenges
- **Syllabus**
- Prerequisites
- Logistics
- Grading Policies

Syllabus

- Week 1: Introduction (Today)
- Week 2: Autoregressive Models
- Week 3: Variational Autoencoders
- Week 4: Normalizing Flow Models
- Week 5: Generative Adversarial Networks
- Week 6: Practice

Foundation

- Week 7: Evaluation of Generative Models
- Week 8: Energy-based Models
- Week 9: Discreteness in Latent Variables
- Week 10: Challenges of Generative Models
- Week 11: Applications of Generative Models
- Week 12: Generative Model Variants

Research

might be changed later ...

- Week 13-14: Paper Reading
- Week 15-16: Project Presentation

Practice


- What and Why
- Generative Models vs. Computer Graphics
- Discriminative vs. Generative
- Selected Generative Applications
- Selected Advanced Topics
- Challenges
- Syllabus
- **Prerequisites**
- Logistics
- Grading Policies

Prerequisites


- Basic knowledge of probabilities
 - Bayes rule, chain rule, probability distribution ...
- Basic knowledge of machine learning/deep learning
 - “Machine Learning”, “Pattern Recognition and Machine Learning”
 - “Computer Vision”, “Natural Language Processing” ...
- Basic programming language
 - Python

- What and Why
- Generative Models vs. Computer Graphics
- Discriminative vs. Generative
- Selected Generative Applications
- Selected Advanced Topics
- Challenges
- Syllabus
- Prerequisites
- **Logistics**
- Grading Policies

Logistics

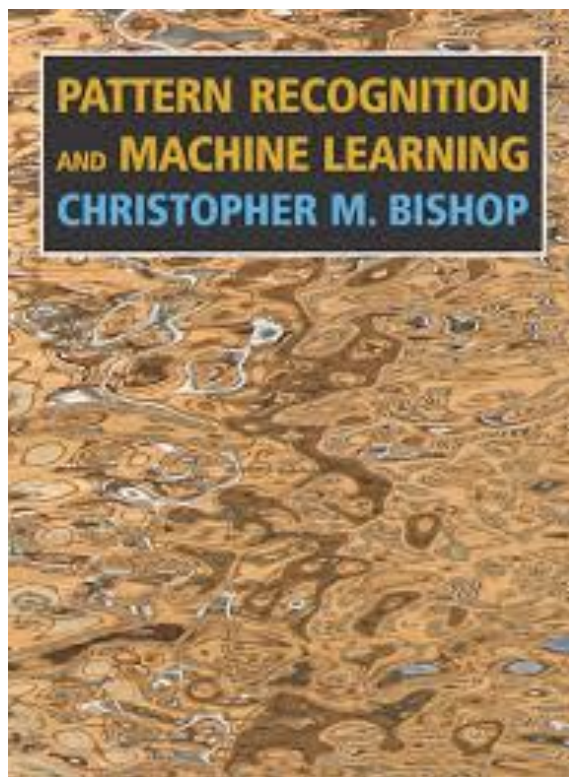

Free Download

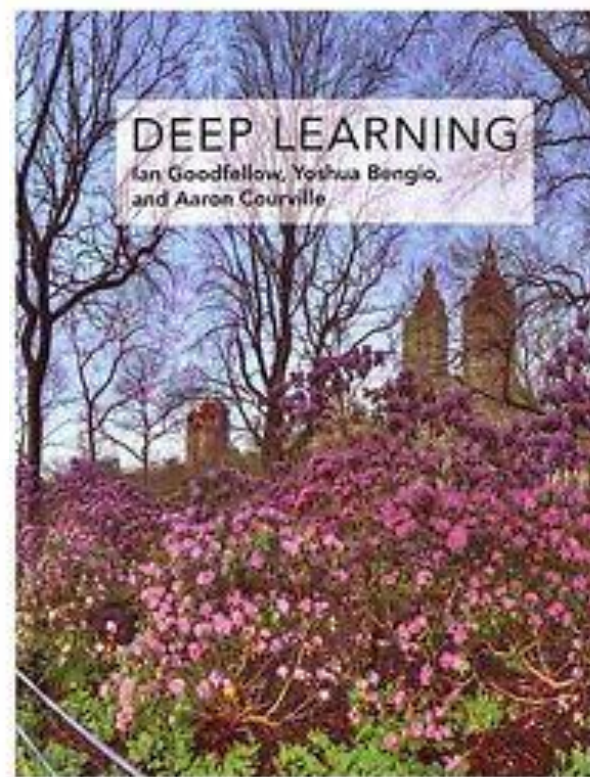

Free Download

Logistics



Deep Generative Models

Stefano Ermon, Aditya Grover

<https://deepgenerativemodels.github.io>



Deep Generative Models

Rajesh Ranganath

<https://cs.nyu.edu/courses/spring18/CSCI-GA.3033-022/>

- What and Why
- Generative Models vs. Computer Graphics
- Discriminative vs. Generative
- Selected Generative Applications
- Selected Advanced Topics
- Challenges
- Syllabus
- Prerequisites
- Logistics
- **Grading Policies**

Grading Policies

- **Paper Reading 40%**
 - Understanding (Q/A) 20%
 - Presentation 20%
 - **Course Project 50%**
 - Proposal 10%
 - Open-source quality 15%
 - Report 15%
 - **Others 20%**
 - Discussion
 - Attendance
- 1~2 students/group
 - Topic: application or theory
 - Open source: Github repository
 - 4 Pages Report
 - Motivation
 - Introduction
 - Related Work
 - Method
 - Evaluation
 - Conclusion

Thanks